

Product Summary

V_{RRM}	1200 V
$I_F (T_C=120^{\circ}\text{C})$	100 A*
Q_C	465 nC*

Features

- Low leakage current (I_R)
- Zero reverse recovery current
- Temperature independent switching behavior
- Positive temperature coefficient on V_F
- High surge current capacity
- Low capacitive charge

Benefits

- Copper base plate with AlN isolation for low thermal resistance
- System cost savings due to smaller magnetics
- System efficiency improvement over Si diodes
- Reduction of heat sink requirements
- Enabling higher frequency
- Reduced EMI
- Isolation voltage: 2500V

Applications

- Switch mode power supplies (SMPS)
- Uninterruptible power supplies
- Server/telecom power supplies
- Power factor correction
- Solar

Package Pin Definitions

- Pin 1,4 - Cathode
- Pin 2,3 - Anode

Package Parameters

Part Number	Marking	Package
B2DM100120N1	B2DM100120N1	SOT-227


* Per Leg, ** Per Device

Package: SOT-227



*Backside is isolated

Electrical Connection



Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Value	Unit
V_{RRM}	Repetitive peak reverse voltage		1200	V
V_{RSM}	Non-repetitive peak reverse voltage		1200	V
I_F	Continuous forward current	$T_c=25^\circ\text{C}$	175*/350**	A
		$T_c=120^\circ\text{C}$	100*/200**	
I_{FSM}	Non-repetitive forward surge current	$T_c=25^\circ\text{C}$, $t_p=10\text{ms}$ Half sine wave	540*	A
$\int i^2 dt$	i^2t value	$T_c=25^\circ\text{C}$, $t_p=10\text{ms}$	1450*	A ² S
P_{tot}	Power dissipation	$T_c=25^\circ\text{C}$ $T_c=110^\circ\text{C}$	652*/1304** 283*/566**	W
T_j	Operating junction temperature		-55~175	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~175	$^\circ\text{C}$

* Per Leg, ** Per Device

Thermal and Mechanical Characteristics

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
$R_{th(jc)}$	Thermal resistance from junction to case			0.24*/ 0.12**		K/W
M_d	Mounting torque	M4-0.7 screws			1.5	N/m
M_{dt}	Terminal connection torque	M4-0.7 screws			1.3	N/m
W_t	Package weight			29		g
V_{ISOL}	Isolation voltage	$I_{ISOL}<1\text{mA}$, RMS, 50Hz, 1min	2500			V
d_{Ctt}	Creepage Distance on Surface	Terminal to Terminal	10.4			mm
d_{Ctb}		Terminal to Backside	9.6			mm
d_{Stt}	Clearance Distance Through Air	Terminal to Terminal	4.4			mm
d_{Stb}		Terminal to Backside	8.4			mm
	Internal isolation		AIN			

* Per Leg, ** Per Device

Electrical Characteristics(Per Leg)
Static Characteristics

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
V_{DC}	DC blocking voltage	$T_J=25^{\circ}C$	1200			V
V_F	Diode forward voltage	$I_F=100A$ $T_J=25^{\circ}C$ $I_F=100A$ $T_J=175^{\circ}C$		1.53 2.3	1.9 3.1	V
I_R	Reverse current	$V_R=1200V$ $T_J=25^{\circ}C$ $V_R=1200V$ $T_J=175^{\circ}C$		10 90	700 900	μA

AC Characteristics

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
Q_C	Total capacitive charge	$V_R=800V$ $T_J=25^{\circ}C$ $Q_C=\int_0^{t_{VR}} C(V)dV$		465		nC
C	Total capacitance	$V_R=1V$ $f=1MHz$ $V_R=400V$ $f=1MHz$ $V_R=800V$ $f=1MHz$		5843 430 330		pF
E_C	Capacitance stored energy	$V_R=800V$		240		μJ

Typical Performance(Per Leg)

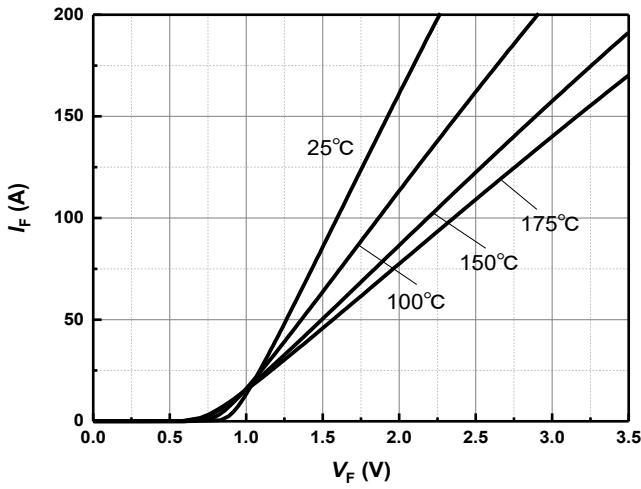


Figure 1 Typical forward characteristics

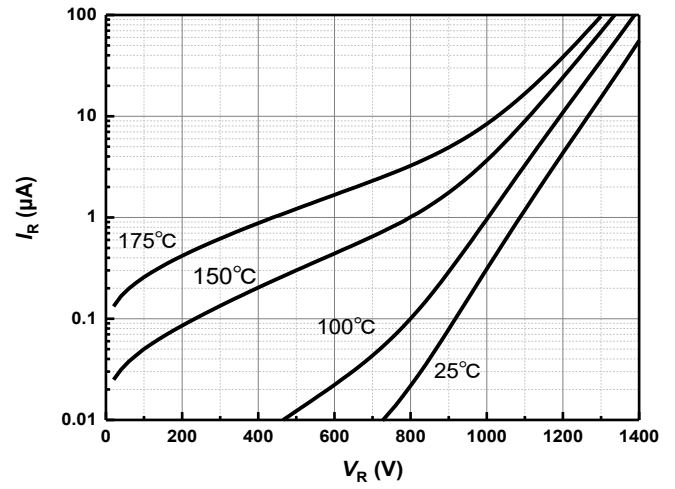


Figure 2 Typical reverse current as function of reverse voltage

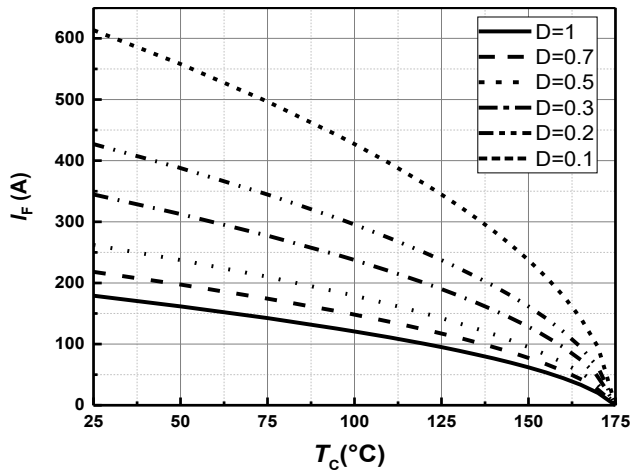


Figure 3 Diode forward current as function of temperature, D=duty cycle

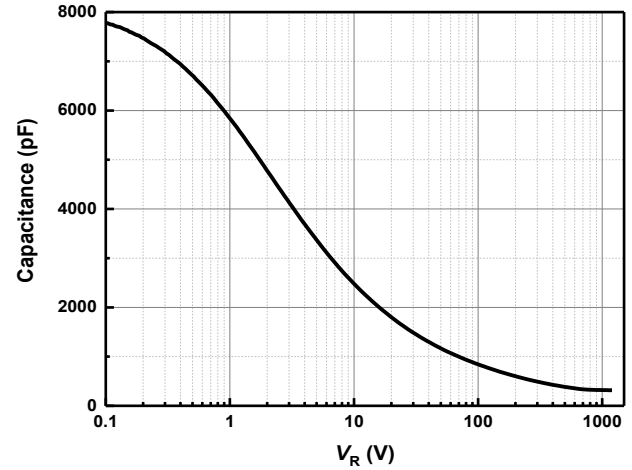


Figure 4 Typical capacitance as function of reverse voltage, $C=f(V_R)$; $T_J=25^\circ\text{C}$; $f=1\text{ MHz}$

Typical Performance

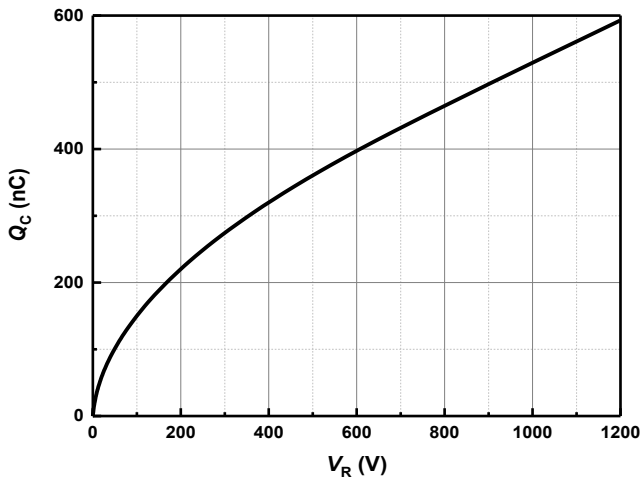


Figure 5 Typical reverse charge as function of reverse voltage

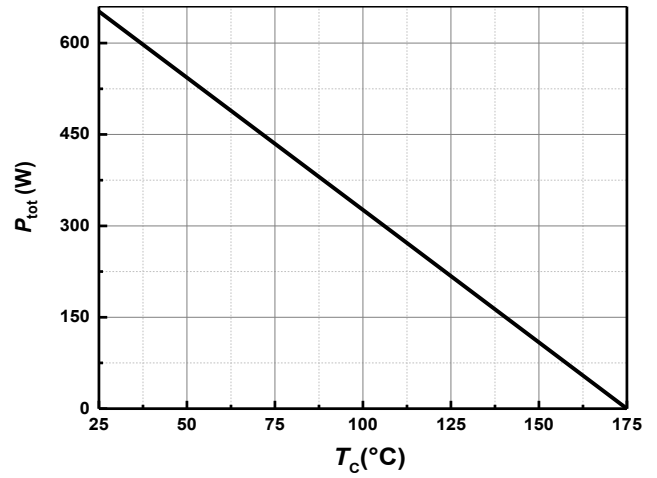


Figure 6 Power dissipation as function of case temperature

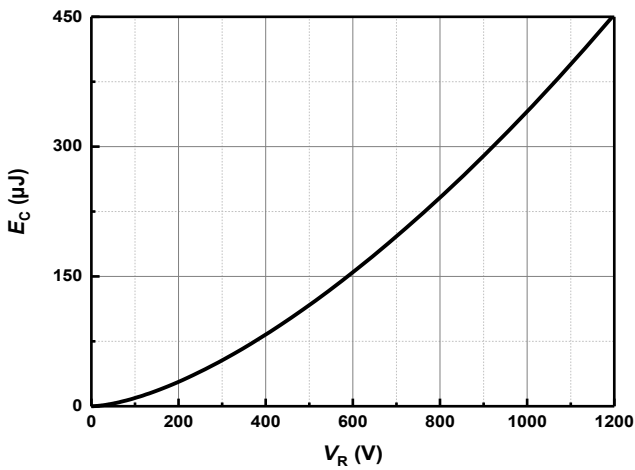


Figure 7 Capacitance stored energy


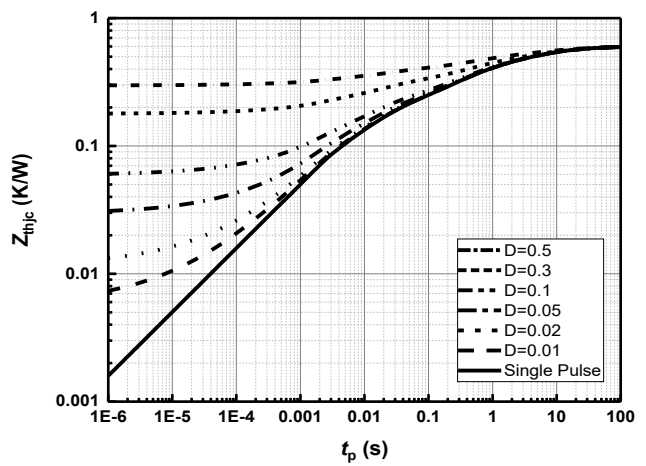


Figure 8 Max. transient thermal impedance, $Z_{thjc} = f(t)$, parameter: $D = t / T$

Package Dimensions

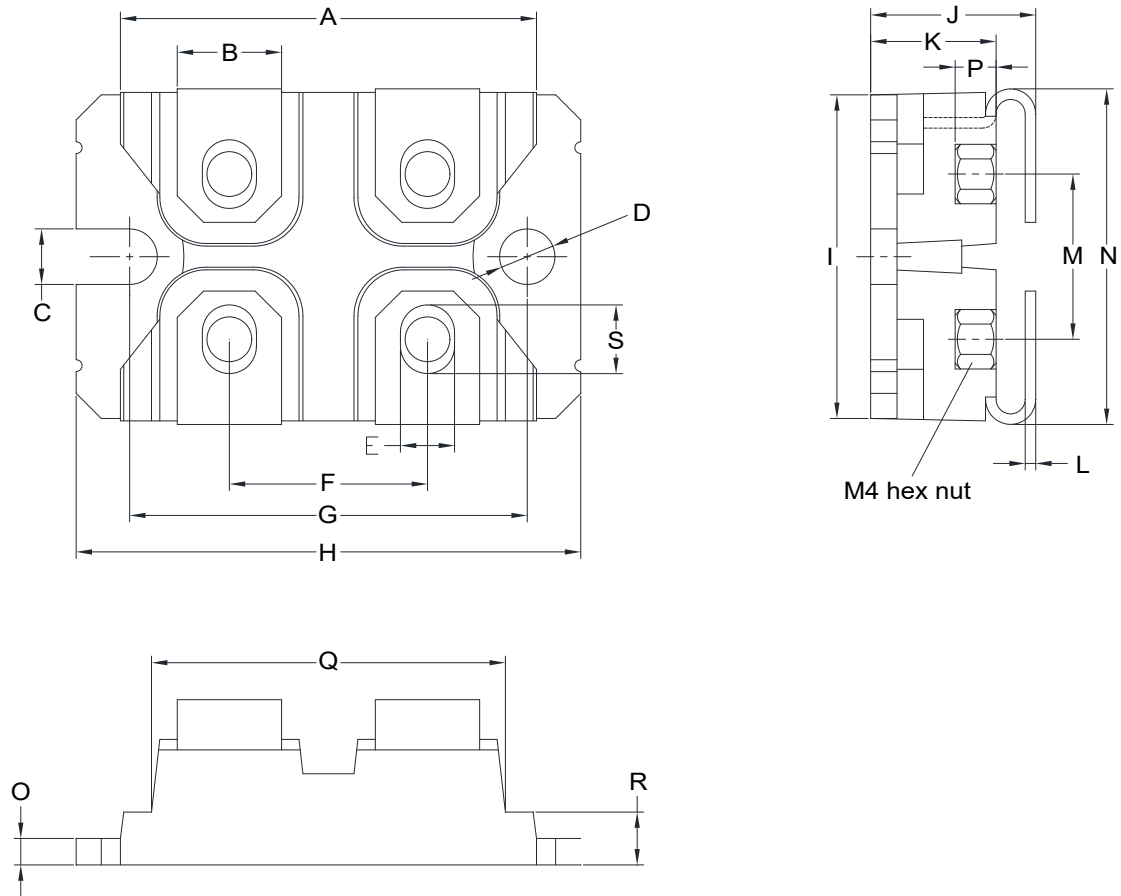

Items	mm	
	MIN	MAX
A	31.40	31.60
B	7.70	8.10
C	4.20	4.40
D	4.20	4.40
E	4.10	4.30
F	14.90	15.10
G	30.10	30.20
H	38.00	38.40
I	23.80	24.20
J	12.20	12.70
K	9.40	9.60
L	0.75	0.85
M	12.40	12.60
N	24.50	25.40
O	1.90	2.10
P	3.10	3.20
Q	26.60	27.00
R	3.80	4.20
S	5.10	5.40

Revision History

Document Version	Date of Release	Description of Changes
Rev. 0.0	2022-11-15	Release of the datasheet.

BASiC Semiconductor Ltd.
Shenzhen, China
© 2022 BASiC Semiconductor Ltd.
All Rights Reserved.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest BASiC Semiconductor Office

Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, BASiC semiconductor Ltd. hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.